




TRANSPARENT DIGITAL POSTER

For Window Advertising All Around The World

SPECIFICATION OF XT3S & XT3M

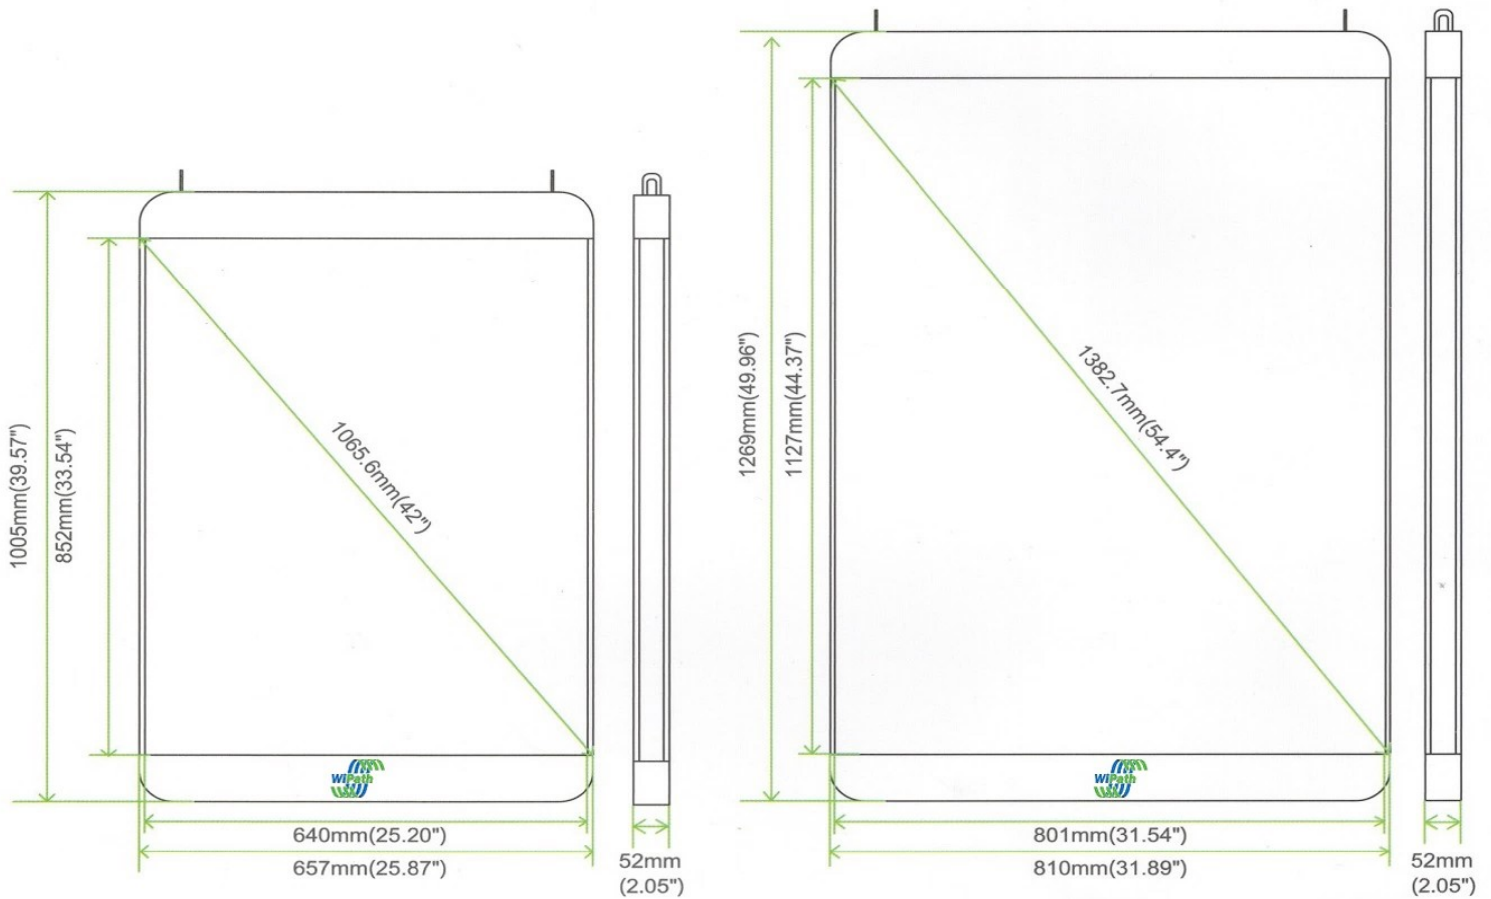

XT3S

XT3M

Model	XT3S	XT3M
Pixel Pitch(mm)	W3.33 x H6.66	W3.13 x H6.26
LED Model	SMD2020	SMD2020
Brightness(nit)	≥5500	≥5500
Transparency	68%	68%
Display size(W X H)	640mm x 852mm	801mm x 1127mm
	25.20" x 33.54"	31.54" x 44.37"
Cabinet dimension(W X H X D)	657mm x 1005mm x 52mm	810mm x 1269mm x 52mm
	25.87" x 39.57" x 2.05"	31.89" x 49.96" x 2.05"
Display resolution(W X H)	192 x 128	256 x 180
Max. Power(W/set)	600	720
Avg. Power(W/set)	180	210
Ingress Protection	IP61	IP61
Refresh rate(Hz)	3000	3000
Input Power	AC100V~AC240V	AC100V~AC240V
Display Weight	20kg/set (44.1lb/set)	28kg/set (61.74lb/set)
Package weight	24kg (52.92lb/set)	34kg (74.97lb/set)
Package size	1115mm x 764mm x 175mm	1380mm x 875mm x 175mm
	43.9" x 30.08" x 6.89"	54.33" x 34.45" x 6.89"
Package mated	Carton Box	Carton Box
Working Temp.	-10~40℃	-10~40℃